

ELECTRICAL CHARACTERISTICS

Rated power	Pm	W	260	265	270
Open circuit voltage	Voc	V	37.9	38.2	38.3
Maximum power voltage	Vmp	V	31.03	31.2	31.3
Short circuit current	Isc	A	8.82	9.02	9.12
Maximum power current	Imp	A	8.39	8.50	8.63
Module efficiency	η	%	15.97-16.26	16.27-16.57	16.58-16.88
Power tolerance	W			-0 / +4.99	

CONSTRUCTION

Cell / Matrix	60; Mono Crystalline; 156 x 156mm / 10 x 6
Dimension	1650 x 987 x 35 mm
Weight	17 kg
Glass	ARC; Low Iron; Tempered; High Light Transmission; 3.2mm
Junction Box	IP67 / IP68; Potted
Cable	4mm ² / 12 AWG (UL); 1000±50mm length
Connector	MC4 Compatible
Diode	Schottky Bypass Diodes; 3 Nos
Frame	18 μ Anodized aluminium alloy; twin wall profile
Locking	Corner key type

MAXIMUM RATINGS

System Voltage	1000VDC (IEC)
Fuse Rating	15 A
Application Class	Class A (Protection Class II)
Snow Load	5400 Pa
Wind Load	2400 Pa




TEMPERATURE RATINGS

NOCT	45°C (±2°C)
Tc of Voc	-0.34 %/°C
Tc of Isc	+0.05 %/°C
Tc of Pm	-0.43 %/°C
Operating range	-40°C to +85°C

SALIENT FEATURES


- Extended power warranty
- PID resistant
- 1000V (IEC) Certified
- Micro-crack free
- Triple stage 100% in-line EL passed
- Higher energy yield on field performance
- More than 25 in-house quality checks
- Positive tolerance up to +5W
- 5400 Pa load
- Best in class material for true 25 years life
- IEC 61215, 61730, 61701; MCS, CE, CEC

I-V Curve of 270W at 25°C cell temp. and different Irradiance level

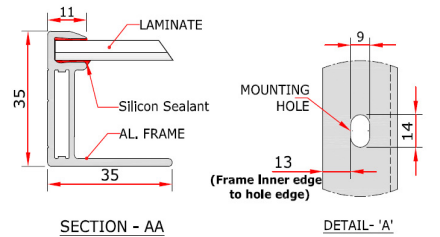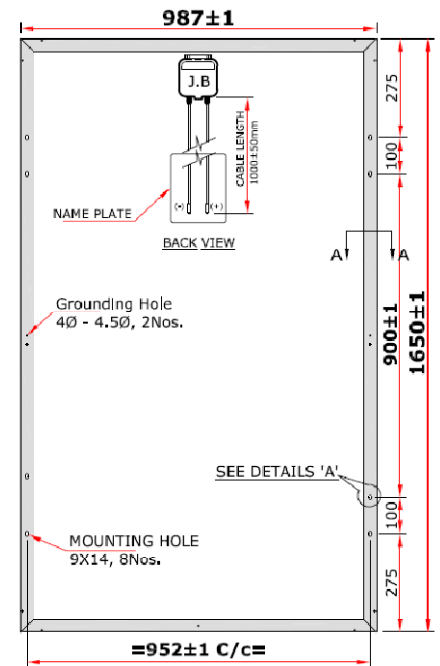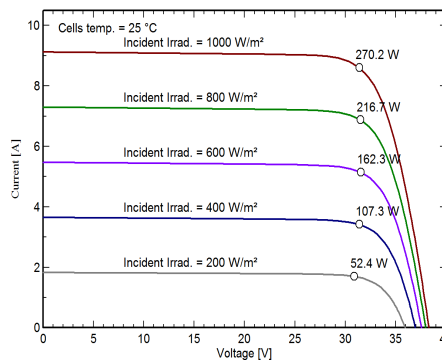

WARRANTY

Product	10 Years
Performance	90% of rated power for 12 Yr 81% of rated power for 25 Yr

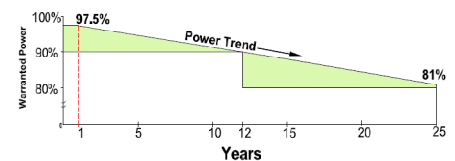

Notes :

Note: • Design and Specifications are subject to change without notice. • Electrical Parameters measured at STC only (at 25°C, 1000W/M²). • Please refer to installation manual and strictly adhere to instruction / guidelines to qualify for warranty terms.

