



36 CUT CELL MODULE

HST36CXXXP

ELECTRICAL CHARACTERISTICS		
RATED POWER (Watt)	37	40
OPEN CIRCUIT VOLTAGE- V_{oc} (Volt)	21.70	22.0
MAXIMUM POWER VOLTAGE- V_{mp} (Volt)	17.5	18.0
SHORT CIRCUIT CURRENT- I_{sc} (Amp)	2.33	2.50
MAXIMUM POWER CURRENT- I_{mp} (Amp)	2.12	2.23
OUTPUT TOLERANCE (%)	±5	
CELLS	36	
CELL LAYOUT	9 x 4	



MECHANICAL CHARACTERISTICS	
MODULE DIMENSIONS (mm)	646 x 536 x 33
WEIGHT (KG, APPROX)	4.5

ABSOLUTE MAXIMUM RATINGS	
OPERATING TEMPERATURE	-40°C to +85°C

GENERAL	
FRAME	ANODISED ALUMINIUM

WARRANTY	
5 YEARS PRODUCT WARRANTY	
10 YEARS FOR 80% OF RATED POWER	

HHV SOLAR TECHNOLOGIES LIMITED
 No. 31,32,33,34 & 37, KIADB Industrial Area, Dabaspet, Nelamangala Taluk, Bangalore Rural 562 111, Karnataka, INDIA.
 Ph: +91 80 2263 3700; Fax: +91 80 2263 3811
info@hhsolar.com ; www.hhsolar.com

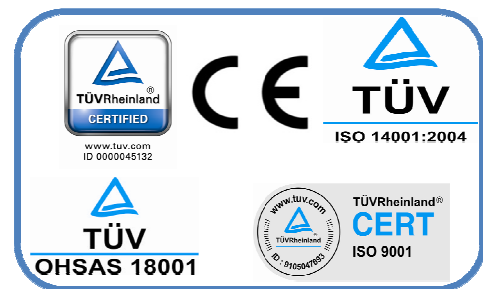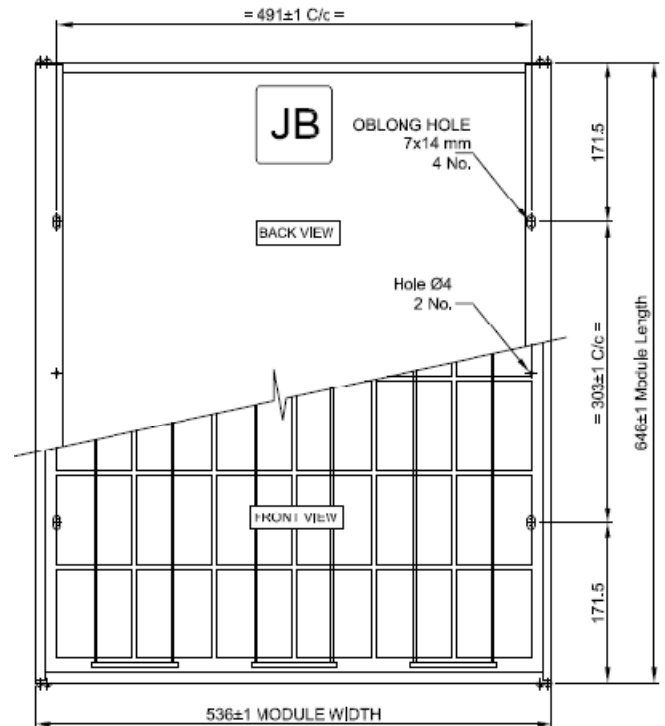

Note:

1. Design and Specifications are subject to change without notice.
2. Electrical Parameters measured at STC only (at 25°C, 1000 W/M²).
3. Please refer to installation manual and strictly adhere to instruction / guidelines to qualify for warranty terms.